


**SuperLite™ 1.67
Transitions Gray**

Material Data:

Index Nd	1.664
Abbe Value Nd	32.0
Density gr/cm³	1.37

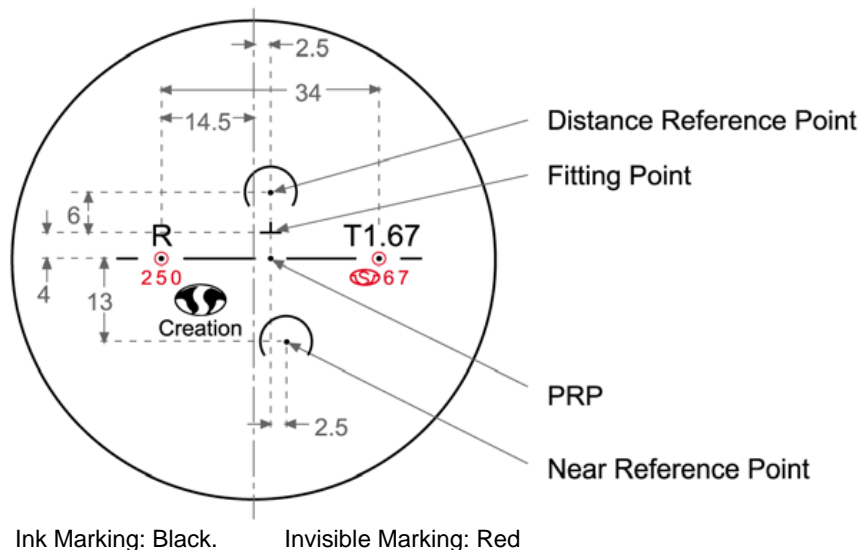

Minimum Fitting Height: 19mm	PRP Decentration: 2.5mm	Fitting Point: 4mm above PRP
------------------------------	-------------------------	------------------------------

*** Do not sag! Use printed sag values for power calculations only.
Minimum Center Thickness for Surfacing 1.5mm.**

Blank Specifications

Nominal Base	True Base 1.530	Base Radius [mm]	Sag 50mm*	Concave Curve	CT [mm]	ET [mm]	Diameter	Add Powers
1.50	1.47	360.54	0.88	6.10	10.3	14.9	72/75	1.00 – 3.50
3.00	2.99	177.25	1.77	6.10	8.6	10.8	72/75	1.00 – 3.50
4.50	4.52	117.25	2.70	6.10	8.1	9.6	72/75	1.00 – 3.50
5.50	5.52	96.14	3.31	6.10	6.8	6.9	72/75	1.00 – 3.50
6.50	6.51	81.41	3.93	6.10	9.4	8.3	72/75	1.00 – 3.50
7.50	7.53	70.38	4.59	6.10	10.9	7.9	72/75	1.00 – 3.50

Prescription Range - Sphere: -12.50[D] to +8.00[D] Cylinder: up to -6.00[D]

Nominal Base	Power Range
1.50	-12.50 to -4.00
3.00	-3.75 to -0.25
4.50	-0.00 to +2.25
5.50	+2.50 to +3.75
6.50	+4.00 to +6.00
7.50	+6.25 to +8.00