


SuperLite™ 1.60

Clear

Coated and Uncoated

Material Data:

Index Nd	1.592
Abbe Value Nd	42.0
Density gr/cm³	1.30

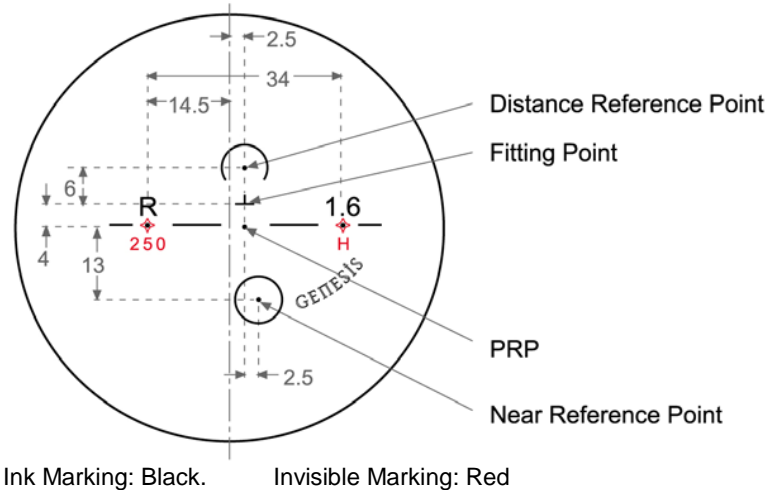

Minimum Fitting Height: 19mm	PRP Decentration: 2.5mm	Fitting Point: 4mm above PRP
------------------------------	-------------------------	------------------------------

*** Do not sag! Use printed sag values for power calculations only.
 Minimum Center Thickness for Surfacing 1.5mm.**

Blank Specifications

Nominal Base	True Base 1.530	Base Radius [mm]	Sag 50mm*	Concave Curve	CT [mm]	ET [mm]	Diameter	Add Powers
1.50	1.51	351.68	0.89	6.10	9.7	15.0	75 / 80	0.75 – 3.50
3.00	3.14	169.05	1.86	6.10	10.4	13.7	75 / 80	0.75 – 3.50
5.00	5.15	102.89	3.08	6.10	7.6	8.4	75 / 80	0.75 – 3.50
6.50	6.50	81.57	3.93	6.10	9.6	8.1	75 / 80	0.75 – 3.50
7.50	7.30	72.65	4.40	6.10	10.8	8.3	75 / 80	0.75 – 3.50

Prescription Range - Sphere: -11.25[D] to +7.00[D] Cylinder: up to -6.00[D]

Nominal Base	Power Range
1.50	-11.25 to -6.25
3.00	-6.00 to -2.00
5.00	-1.75 to +1.00
6.50	+1.25 to +3.00
7.50	+3.25 to +7.00