


SuperLite™ 1.67
Polarized

Material Data:

Index Nd	1.664
Abbe Value Nd	32.0
Density gr/cm³	1.37

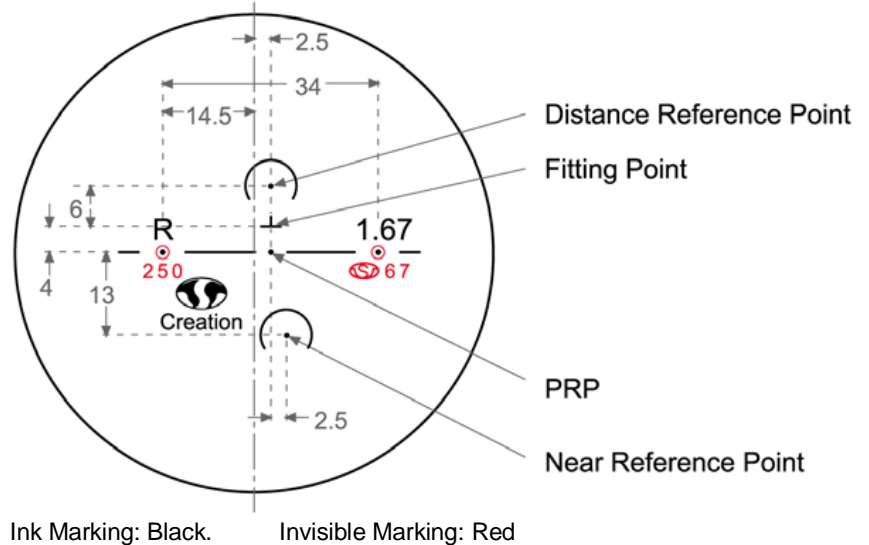

Minimum Fitting Height: 19mm	PRP Decentration: 2.5mm	Fitting Point: 4mm above PRP
------------------------------	-------------------------	------------------------------

*** Do not sag! Use printed sag values for power calculations only.
Minimum Center Thickness for Surfacing 1.5mm.**

Blank Specifications

Nominal Base	True Base 1.530	Base Radius [mm]	Sag 50mm*	Concave Curve	CT [mm]	ET [mm]	Diameter	Add Powers
1.50	1.59	333.33	0.94	6.40	10.4	16.0	74/79	1.00 – 3.00
3.00	3.10	170.97	1.84	6.40	8.8	12.5	74/79	1.00 – 3.00
4.50	4.60	115.22	2.75	6.40	8.5	11.0	74/79	1.00 – 3.00
5.50	5.63	94.14	3.38	6.40	7.6	8.0	74/79	1.00 – 3.00
6.50	6.60	80.30	3.99	6.40	10.0	8.5	74/79	1.00 – 3.00
7.50	7.59	69.83	4.63	6.40	11.5	8.5	74/79	1.00 – 3.00

Prescription Range - Sphere: -12.50[D] to +8.00[D] Cylinder: up to -6.00[D]

Nominal Base	Power Range
1.50	-12.00 to -4.00
3.00	-3.75 to -0.25
4.50	-0.00 to +2.25
5.50	+2.50 to +3.75
6.50	+4.00 to +6.00
7.50	+6.25 to +8.00